


panel mounting socket outlet, angled - flange 85x85,
fixing centers 70x70

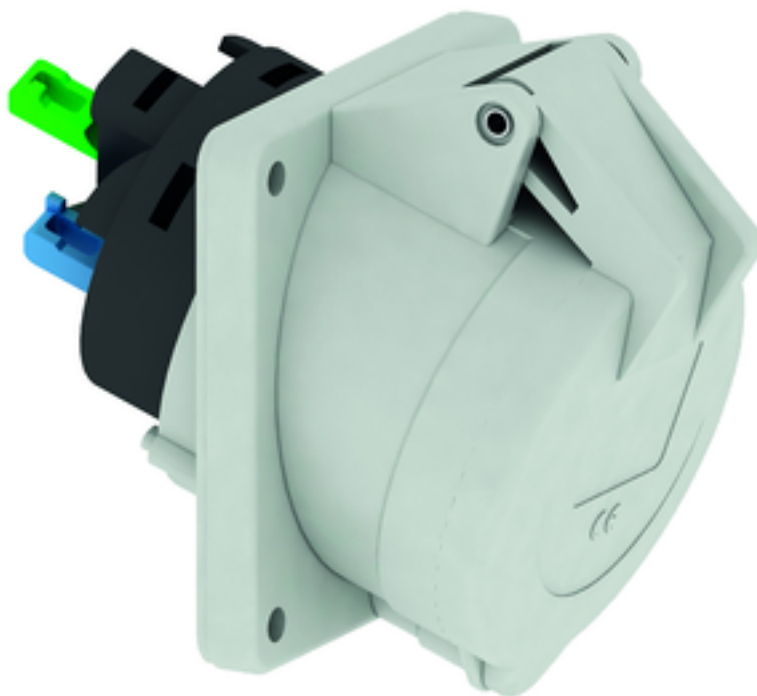

Product description	
BALS-Prd.-Nr	120442
EAN	4024941940115
Product category	TE panel mounting socket outlet QUICK-CONNECT, angled, TE panel mounting socket outlet QUICK-CONNECT, angled
Current	16A, 16A
Number of poles	3p, 3p
Arrangement of phases	2P+PE, 2P+PE
Position of earth contact	1 h, 1 h

Product description	
Voltage	> 50V for all other not classified voltages and/or frequencies. This time position can additionally process in special applications, in which a distinction to standardized positions needed to be used., > 50V for all other not classified voltages and/or frequencies. This time position can additionally process in special applications, in which a distinction to standardized positions needed to be used.
Protection degree	IP44, IP44
Colour code	grey RAL 7035, grey RAL 7035
Colour of appliance	Hinged lid grey RAL 7035, Enclosure grey RAL 7035, Hinged lid grey RAL 7035, Enclosure grey RAL 7035
Connection design	screwless spring terminals with Kontex-Kontakt, screwless spring terminals with Kontex-Kontakt
Maximum conductor size	4,0 qmm, 4,0 qmm
Cable entry	other, other
Height	85mm, 85mm
Width	85mm, 85mm
Depth	103mm, 103mm
Flange size vertical in mm	85mm, 85mm
Flange size horizontal in mm	85mm, 85mm
Drill hole dist. vertical mm	70mm, 70mm
Drill hole dist. horizontal mm	70mm, 70mm
Material of enclosure	Polyamide, Polyamide
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated, The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties

The inclination is 20°, The inclination is 20°

Logistics data

Weight/pcs	0.125 kg / Piece
------------	------------------

Packaging	Bag
-----------	-----

Content amount	1 ST
----------------	------

EAN	4024941940115
-----	---------------

Length	103 mm
--------	--------

Width	85 mm
-------	-------

Height	85 mm
--------	-------

Weight	0.126 kg
--------	----------

Volume	744.175 ccm
--------	-------------

Packaging	Carton
-----------	--------

Content amount	10 ST
----------------	-------

EAN	4024941836197
-----	---------------


Length	245 mm
--------	--------

Width	177 mm
-------	--------

Height	185 mm
--------	--------

Weight	1.383 kg
--------	----------

Volume	7,140 ccm
--------	-----------



4 MB 264

Ampere Polzahl	16 3	16 4	16 5	32 3	32 4	32 5
a	85,0	85,0	85,0	85,0	85,0	85,0
b	85,0	85,0	85,0	85,0	85,0	85,0
c	70,0	70,0	70,0	70,0	70,0	70,0
d	70,0	70,0	70,0	70,0	70,0	70,0
e ø	5,5	5,5	5,5	5,5	5,5	5,5
f	8,0	8,0	8,0	8,0	8,0	8,0
h	46,0	46,0	46,0	55,0	55,0	55,0
i	50,0	51,0	54,0	60,0	60,0	60,0
l ø	57,0	65,0	70,0	78,0	78,0	78,0
α	20°	20 °	20°	20°	20°	20°
Leiter mm² min	1,5	1,5	1,5	2,5	2,5	2,5
Leiter mm² max	4	4	4	10	10	10