

panel mounting socket outlet, angled - flange 114x114,  
with electrical interlocking PSK




| Product description       |                                      |
|---------------------------|--------------------------------------|
| BALS-Prd.-Nr              | 12511                                |
| EAN                       | 4024941125116                        |
| Product category          | Panel mounting socket outlet, angled |
| Current                   | 63A                                  |
| Number of poles           | 4p                                   |
| Arrangement of phases     | 3P+PE                                |
| Position of earth contact | 7 h                                  |
| Voltage                   | 480 - 500V~                          |

| Product description            |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                                                  |
| Protection degree              | IP44                                                                                                     |
| Colour code                    | black RAL 9005                                                                                           |
| Colour of appliance            | Hinged lid black RAL 9005, Enclosure grey RAL 7035                                                       |
| Connection design              | screw terminal as box terminal with Kontex-contact                                                       |
| Maximum conductor size         | 25.0 qmm                                                                                                 |
| Cable entry                    | other                                                                                                    |
| Height                         | 119mm                                                                                                    |
| Width                          | 114mm                                                                                                    |
| Depth                          | 148mm                                                                                                    |
| Flange size vertical in mm     | 114mm                                                                                                    |
| Flange size horizontal in mm   | 114mm                                                                                                    |
| Drill hole dist. vertical mm   | 90mm                                                                                                     |
| Drill hole dist. horizontal mm | 90mm                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                |
| Contacts                       | the contacts are brass nickel plated, The contact carrier is made of high temperature resistant material |

| Additional technical properties |                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                 | Electrically interlocked with pilot contact for potential-free switching of incorporated auxiliary contact in pilot drill of the socket., The inclination is 15° |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.53 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |
| EAN            | 4024941125116   |
| Length         | 148 mm          |
| Width          | 114 mm          |
| Height         | 119 mm          |
| Weight         | 0.531 kg        |
| Volume         | 2,007.768 ccm   |
| Packaging      | Carton          |
| Content amount | 5 ST            |
| EAN            | 4024941843812   |
| Length         | 295 mm          |
| Width          | 185 mm          |
| Height         | 215 mm          |
| Weight         | 2.814 kg        |
| Volume         | 9,975 ccm       |

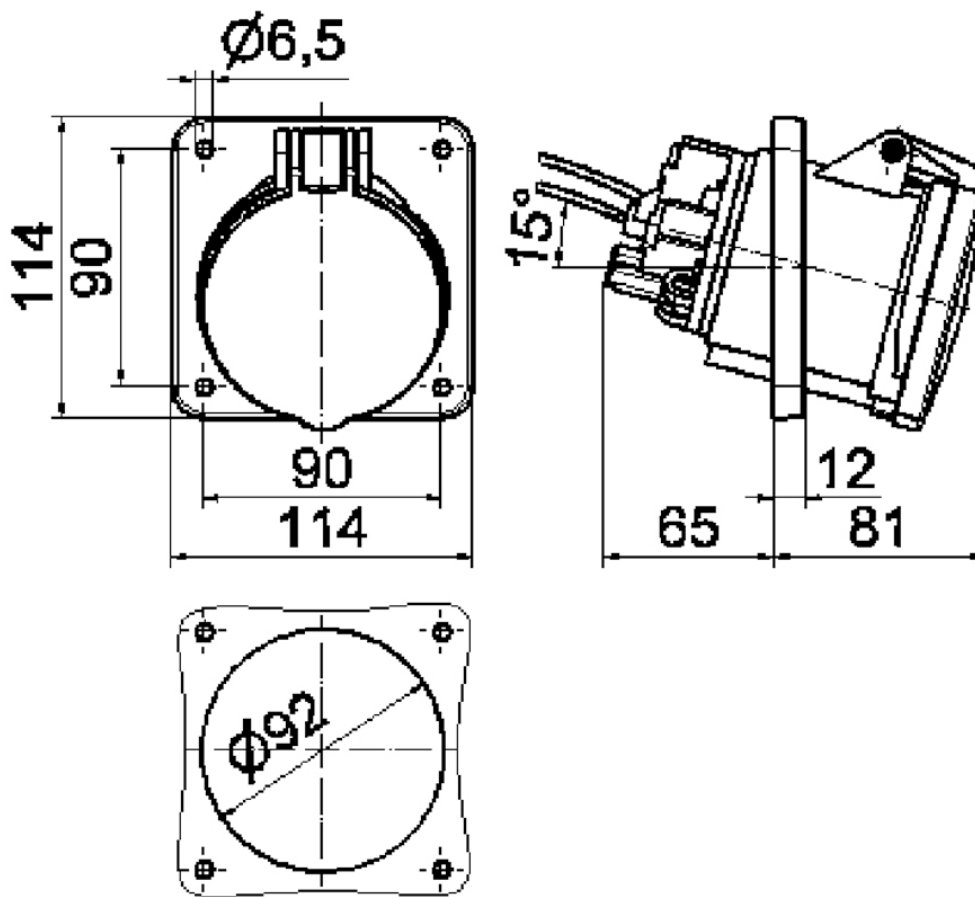

4 MB 273