


connector - with screw terminals one piece housing

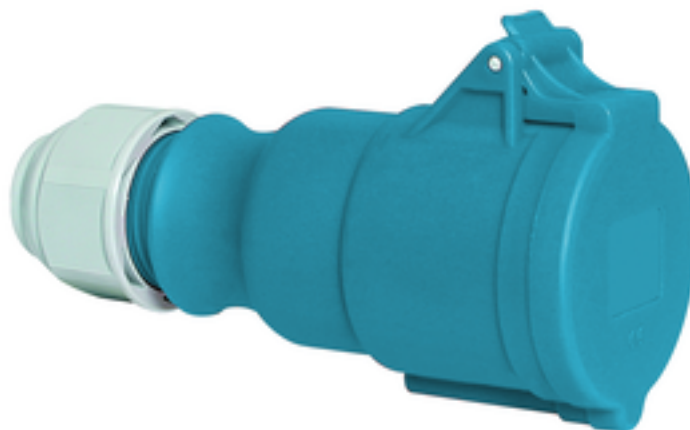


Product description	
BALS-Prd.-Nr	31016-TLS
EAN	4024941199469
Product category	TLS connector MULTI-GRIP cable gland
Current	32A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	9 h
Voltage	200 - 250V~
Frequency	50/60Hz

Product description	
Protection degree	IP44
Colour code	blue RAL 5015
Colour of appliance	Hinged lid blue RAL 5015, Enclosure blue RAL 5015, Cable gland grey RAL 7035
Connection design	with screw terminal
Maximum conductor size	6,0 qmm
Cable entry	with cable gland
Height	181mm
Width	67mm
Depth	94mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, The contacts are brass

Additional technical properties	
	MULTI-GRIP cable gland with gasket and integrated strain relief, one piece housing, For cable diameter from 11 up to max. 23,5 mm

Logistics data	
Weight/pcs	0.248 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941199469

Logistics data	
Length	94 mm
Width	67 mm
Height	181 mm
Weight	0.249 kg
Volume	1,139.938 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941962971
Length	258 mm
Width	183 mm
Height	212 mm
Weight	2.632 kg
Volume	8,750 ccm



Ampere	16	16	16	32	32	32	
Polzahl	3	4	5	3	4	5	
a ø	51,0	58,0	65,0	67,0	67,0	73,0	
b	145,0	148,0	156,0	185,0	185,0	185,0	
c	74,0	84,0	90,0	94,0	94,0	102,0	
e ø	18,0	18,0	18,0	23,0	23,0	23,0	
Leiter mm ² min	1	1	1	2,5	2,5	2,5	
Leiter mm ² max	2,5	2,5	2,5	6	6	6	