


connector - with screw terminals one piece housing

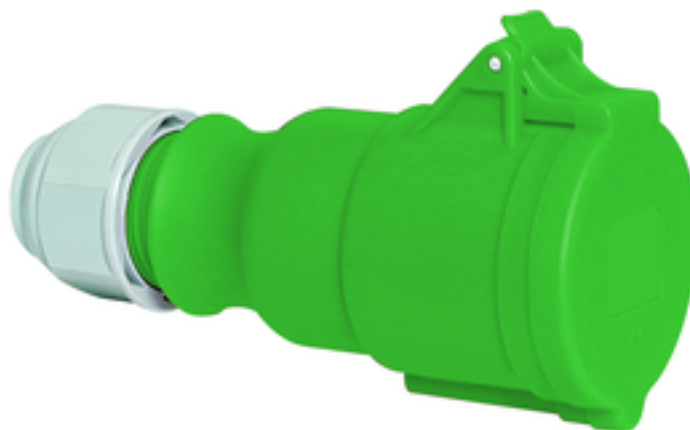


Product description	
BALS-Prd.-Nr	31179-TLS
EAN	4024941199575
Product category	TLS connector MULTI-GRIP cable gland
Current	16A
Number of poles	3p
Arrangement of phases	2P+PE
Position of earth contact	2 h
Voltage	> 50V~
Frequency	> 300 - 500Hz

Product description	
Protection degree	IP44
Colour code	green RAL 6002
Colour of appliance	Hinged lid green RAL 6002, Cable gland grey RAL 7035, Enclosure green RAL 6002
Connection design	with screw terminal
Maximum conductor size	2,5 qmm
Cable entry	with cable gland
Height	149mm
Width	52mm
Depth	74mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, The contacts are brass

Additional technical properties	
	For cable diameter from 8 up to max. 18 mm, MULTI-GRIP cable gland with gasket and integrated strain relief, one piece housing

Logistics data	
Weight/pcs	0.16 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941199575

Logistics data	
Length	74 mm
Width	52 mm
Height	149 mm
Weight	0.161 kg
Volume	573.352 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941788021
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.725 kg
Volume	5,737.5 ccm

							
	Ampere	16	16	16	32	32	32
	Polzahl	3	4	5	3	4	5
	a ø	51,0	58,0	65,0	67,0	67,0	73,0
	b	145,0	148,0	156,0	185,0	185,0	185,0
	c	74,0	84,0	90,0	94,0	94,0	102,0
	e ø	18,0	18,0	18,0	23,0	23,0	23,0
	Leiter mm² min	1	1	1	2,5	2,5	2,5
	Leiter mm² max	2,5	2,5	2,5	6	6	6