



## wall mounting socket outlet - INNOLINQ lead-free, with QUICK-CONNECT

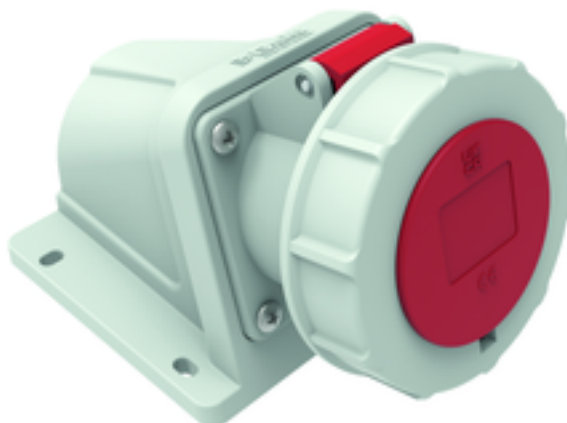

| Product description       |                                         |
|---------------------------|-----------------------------------------|
| BALS-Prd.-Nr              | 112017                                  |
| EAN                       | 4024941440721                           |
| Product category          | Wall mounting socket outlet INNOLINQ QC |
| Current                   | 32A                                     |
| Number of poles           | 4p                                      |
| Arrangement of phases     | 3P+PE                                   |
| Position of earth contact | 6 h                                     |
| Voltage                   | 380 - 415V~                             |

| Product description    |                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                            |
| Protection degree      | IP67/69                                                                                            |
| Colour code            | red RAL 3000                                                                                       |
| Colour of appliance    | Enclosure grey RAL 7035, Collar grey RAL 7035, Hinged lid red RAL 3000, Bayonet ring grey RAL 7035 |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                     |
| Maximum conductor size | 6,0 qmm                                                                                            |
| Cable entry            | top entry M25                                                                                      |
| Height                 | 116mm                                                                                              |
| Width                  | 115mm                                                                                              |
| Depth                  | 166mm                                                                                              |
| Dimension of enclosure | 110x115 mm (HxW)                                                                                   |
| Material of enclosure  | Polyamide                                                                                          |
| Contacts               | The contact carrier is made of polyamide, The contacts are brass                                   |

| Additional technical properties |                                                                      |
|---------------------------------|----------------------------------------------------------------------|
|                                 | This product is without any lead, The cable entry is one at top open |

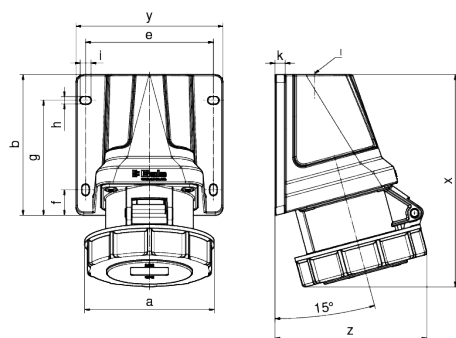

| Ampere Poles   | 16<br>3 | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |
|----------------|---------|---------|---------|---------|---------|---------|
| a              | 71      | 79      | 87      | 80      | 80      | 102     |
| b              | 110     | 110     | 110     | 110     | 110     | 110     |
| e              | 100     | 100     | 100     | 100     | 100     | 100     |
| f              | 20      | 20      | 20      | 20      | 20      | 20      |
| g              | 90      | 90      | 90      | 90      | 90      | 90      |
| h              | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     |
| i              | 8,5     | 8,5     | 8,5     | 8,5     | 8,5     | 8,5     |
| k              | 8       | 8       | 8       | 8       | 8       | 8       |
| l              | M25     | M25     | M25     | M25     | M25     | M25     |
| x              | 152     | 154     | 153     | 166     | 166     | 166     |
| y              | 115     | 115     | 115     | 115     | 115     | 115     |
| z              | 102     | 106     | 109     | 116     | 116     | 120     |
| Cond. mm² min. | 1       | 1       | 1       | 2,5     | 2,5     | 2,5     |
| Cond. mm² max. | 4       | 4       | 4       | 10      | 10      | 10      |

