
wall mounting socket outlet - INNOLINQ lead-free, with QUICK-CONNECT

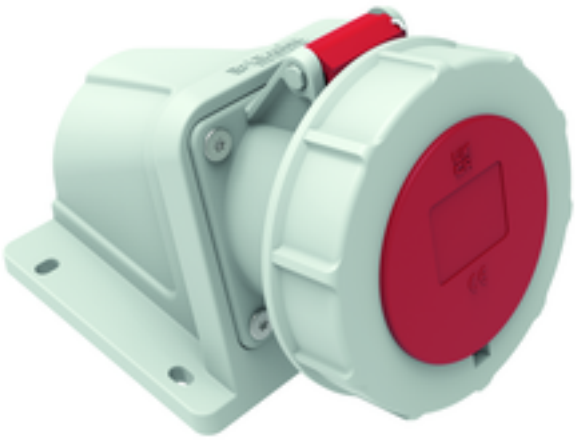


Product description	
BALS-Prd.-Nr	112018
EAN	4024941440745
Product category	Wall mounting socket outlet INNOLINQ QC
Current	32A
Number of poles	5p
Arangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~

CEE-Norm UK Ltd. Unit 2, Highbridge Court, Stafford Park 1, TF3 3BD Telford UK
phone: +44 1952 212700 / fax: +44 1952 212711 / email: sales@ceenorm.co.uk


Product description	
Frequency	50/60Hz
Protection degree	IP67/69
Colour code	red RAL 3000
Colour of appliance	Enclosure grey RAL 7035, Collar grey RAL 7035, Hinged lid red RAL 3000, Bayonet ring grey RAL 7035
Connection design	screwless spring terminals with Kontex-Kontakt
Maximum conductor size	4,0 qmm
Cable entry	top entry M25
Height	120mm
Width	115mm
Depth	166mm
Dimension of enclosure	110x115 mm (HxW)
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, The contacts are brass

Additional technical properties	
	This product is without any lead, The cable entry is one at top open

CEE-Norm UK Ltd. Unit 2, Highbridge Court, Stafford Park 1, TF3 3BD Telford UK
phone: +44 1952 212700 / fax: +44 1952 212711 / email: sales@ceenorm.co.uk

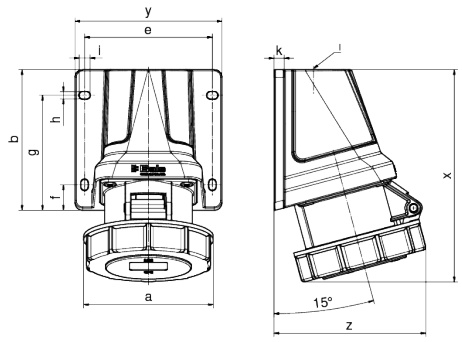

Ampere Poles	16 3	16 4	16 5	32 3	32 4	32 5
a	71	79	87	80	80	102
b	110	110	110	110	110	110
e	100	100	100	100	100	100
f	20	20	20	20	20	20
g	90	90	90	90	90	90
h	5,5	5,5	5,5	5,5	5,5	5,5
i	8,5	8,5	8,5	8,5	8,5	8,5
k	8	8	8	8	8	8
l	M25	M25	M25	M25	M25	M25
x	152	154	153	166	166	166
y	115	115	115	115	115	115
z	102	106	109	116	116	120
Cond. mm² min.	1	1	1	2,5	2,5	2,5
Cond. mm² max.	4	4	4	10	10	10

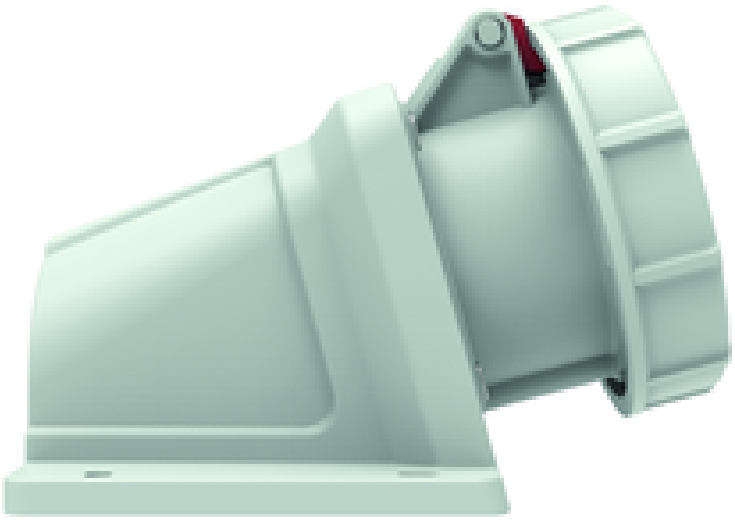



CEE-Norm UK Ltd. Unit 2, Highbridge Court, Stafford Park 1, TF3 3BD Telford UK
phone: +44 1952 212700 / fax: +44 1952 212711 / email: sales@ceenorm.co.uk