

Domestic panel mounting socket outlet, with increased contact protection (shutter), for stationary distributor systems - flange 50x50, fixing centers 38x38

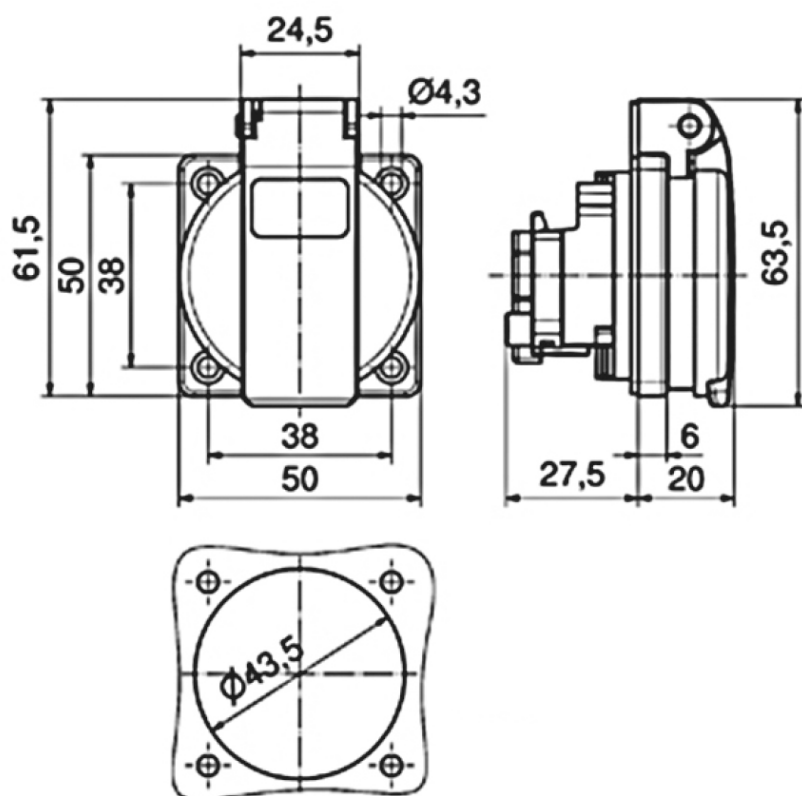


| Product description   |                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------|
| BALS-Prd.-Nr          | 7110109                                                                                             |
| EAN                   | 4024941854092                                                                                       |
| Product category      | Domestic panel mounting socket outlet QUICK-CONNECT screwless push-contact System F German standard |
| Current               | 16A                                                                                                 |
| Number of poles       | 3p                                                                                                  |
| Arrangement of phases | 2P+PE                                                                                               |
| Voltage               | 250V~                                                                                               |

| Product description            |                                                                                |
|--------------------------------|--------------------------------------------------------------------------------|
| Frequency                      | AC                                                                             |
| Protection degree              | IP54                                                                           |
| Colour code                    | black RAL 9005                                                                 |
| Colour of appliance            | Hinged lid black RAL 9005, Enclosure black RAL 9005                            |
| Connection design              | screwless                                                                      |
| Maximum conductor size         | 2,5 qmm                                                                        |
| Cable entry                    | other                                                                          |
| Height                         | 61.5mm                                                                         |
| Width                          | 50mm                                                                           |
| Depth                          | 47.5mm                                                                         |
| Flange size vertical in mm     | 50mm                                                                           |
| Flange size horizontal in mm   | 50mm                                                                           |
| Drill hole dist. vertical mm   | 38mm                                                                           |
| Drill hole dist. horizontal mm | 38mm                                                                           |
| Material of enclosure          | plastic                                                                        |
| Contacts                       | The contact carrier is made of polyamide, the contacts are brass nickel plated |

| Additional technical properties |                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------|
|                                 | The connection is rear, With increased contact protection (shutter), For use in stationary distributor distributor systems |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.053 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941854092    |
| Length         | 47.5 mm          |
| Width          | 50 mm            |
| Height         | 61.5 mm          |
| Weight         | 0.054 kg         |
| Volume         | 146.063 ccm      |
| Packaging      | Carton           |
| Content amount | 20 ST            |
| EAN            | 4024941323482    |
| Length         | 276 mm           |
| Width          | 174 mm           |
| Height         | 80 mm            |
| Weight         | 1.172 kg         |
| Volume         | 2,808 ccm        |

**18 MB 102**