

Domestic panel mounting socket outlet, with increased contact protection (shutter), for stationary distributor systems - flange 75x75, System E Belgian/French standard

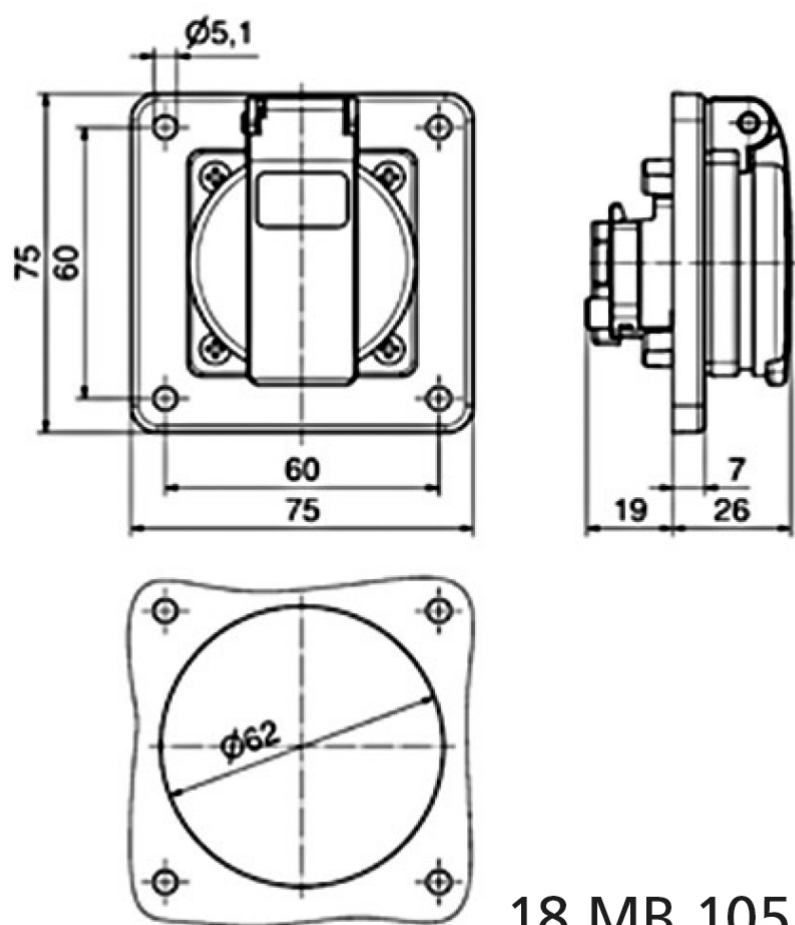


Product description	
BALS-Prd.-Nr	7112309
EAN	4024941939485
Product category	Domestic panel mounting socket, Quick-Connect screwless push-contact System E Belgian/French standard
Current	16A
Number of poles	3p
Arrangement of phases	2P+PE

Product description	
Voltage	250V~
Frequency	AC
Protection degree	IP54
Colour code	black RAL 9005
Colour of appliance	Hinged lid black RAL 9005, Enclosure black RAL 9005
Connection design	screwless
Maximum conductor size	4,0 qmm
Cable entry	other
Height	75mm
Width	75mm
Depth	45mm
Flange size vertical in mm	75mm
Flange size horizontal in mm	75mm
Drill hole dist. vertical mm	60mm
Drill hole dist. horizontal mm	60mm
Material of enclosure	plastic
Contacts	The contact carrier is made of polyamide, the contacts are brass nickel plated

Additional technical properties	
	With earth contact Belgian/French standard, With increased contact protection (shutter), The connection is rear

Logistics data	
Weight/pcs	0.088 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941939485
Length	45 mm
Width	75 mm
Height	75 mm
Weight	0.089 kg
Volume	253.125 ccm
Packaging	Carton
Content amount	20 ST
EAN	4024941323598
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.885 kg
Volume	5,737.5 ccm

**18 MB 105**