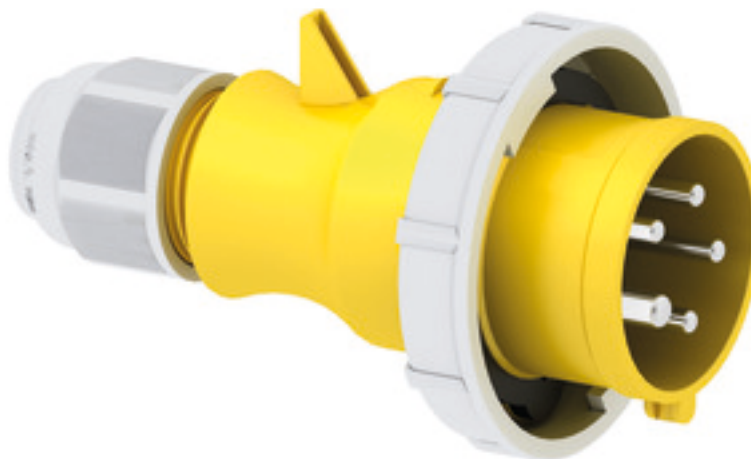


Plug - with screw terminals one piece housing





Product description	
BALS-Prd.-Nr	210587
EAN	4024941109871
Product category	TLS plug with MULTI-GRIP cable gland
Current	16A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	4 h
Voltage	57/100 - 75/130V~
Frequency	50/60Hz

Product description	
Protection degree	IP67
Colour code	yellow RAL 1012
Colour of appliance	Enclosure yellow RAL 1012, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035
Connection design	with screw terminal
Maximum conductor size	2,5 qmm
Cable entry	with cable gland
Height	146mm
Width	86mm
Depth	86mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of polyamide, the contacts are brass nickel plated

Additional technical properties	
	one piece housing, MULTI-GRIP cable gland with gasket and integrated strain relief, For cable diameter from 8 up to max. 18 mm

Logistics data	
Weight/pcs	0.17 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941109871

Logistics data	
Length	86 mm
Width	86 mm
Height	146 mm
Weight	0.171 kg
Volume	1,079.816 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941832106
Length	258 mm
Width	183 mm
Height	212 mm
Weight	1.852 kg
Volume	8,750 ccm

																																																																																																							
	<table> <tr> <th>Ampere</th><th>16</th><th>16</th><th>16</th><th>32</th><th>32</th><th>32</th></tr> <tr> <th>Polzahl</th><th>3</th><th>4</th><th>5</th><th>3</th><th>4</th><th>5</th></tr> <tr> <td>a Ø</td><td>70,0</td><td>78,0</td><td>86,0</td><td>94,0</td><td>94,0</td><td>101,0</td></tr> <tr> <td>b</td><td>94,5</td><td>98,0</td><td>101,0</td><td>115,0</td><td>115,0</td><td>119,0</td></tr> <tr> <td>c</td><td>138,0</td><td>142,0</td><td>145,0</td><td>170,0</td><td>170,0</td><td>174,0</td></tr> <tr> <td>d</td><td>105,5</td><td>109,5</td><td>112,5</td><td>128,0</td><td>128,0</td><td>132,0</td></tr> <tr> <td>e Ø</td><td>18,0</td><td>18,0</td><td>18,0</td><td>23,0</td><td>23,0</td><td>23,0</td></tr> <tr> <td>Leiter mm² min</td><td>1</td><td>1</td><td>1</td><td>2,5</td><td>2,5</td><td>2,5</td></tr> <tr> <td>Leiter mm² max</td><td>2,5</td><td>2,5</td><td>2,5</td><td>6</td><td>6</td><td>6</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>						Ampere	16	16	16	32	32	32	Polzahl	3	4	5	3	4	5	a Ø	70,0	78,0	86,0	94,0	94,0	101,0	b	94,5	98,0	101,0	115,0	115,0	119,0	c	138,0	142,0	145,0	170,0	170,0	174,0	d	105,5	109,5	112,5	128,0	128,0	132,0	e Ø	18,0	18,0	18,0	23,0	23,0	23,0	Leiter mm² min	1	1	1	2,5	2,5	2,5	Leiter mm² max	2,5	2,5	2,5	6	6	6																																		
Ampere	16	16	16	32	32	32																																																																																																	
Polzahl	3	4	5	3	4	5																																																																																																	
a Ø	70,0	78,0	86,0	94,0	94,0	101,0																																																																																																	
b	94,5	98,0	101,0	115,0	115,0	119,0																																																																																																	
c	138,0	142,0	145,0	170,0	170,0	174,0																																																																																																	
d	105,5	109,5	112,5	128,0	128,0	132,0																																																																																																	
e Ø	18,0	18,0	18,0	23,0	23,0	23,0																																																																																																	
Leiter mm² min	1	1	1	2,5	2,5	2,5																																																																																																	
Leiter mm² max	2,5	2,5	2,5	6	6	6																																																																																																	