

## wall mounting socket outlet, fused - housing dimension 225x118, with mounting rail




| Product description       |                                                     |
|---------------------------|-----------------------------------------------------|
| BALS-Prd.-Nr              | 15388                                               |
| EAN                       | 4024941196956                                       |
| Product category          | Quick-Connect TE wall mounting socket outlet, fused |
| Current                   | 32A                                                 |
| Number of poles           | 3p                                                  |
| Arrangement of phases     | 2P+PE                                               |
| Position of earth contact | 4 h                                                 |
| Voltage                   | 100 - 130V~                                         |

| Product description    |                                                                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                                                                                     |
| Protection degree      | IP67                                                                                                                                                                        |
| Colour code            | yellow RAL 1012                                                                                                                                                             |
| Colour of appliance    | Hinged lid yellow RAL 1012, Housing bottom grey RAL 7035, Housing screws grey RAL 7035, Bayonet ring grey RAL 7035, Housing top grey RAL 7035, Operating window smoky topaz |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                                                                                              |
| Maximum conductor size | 10,0 qmm                                                                                                                                                                    |
| Cable entry            | top entry M25/M25 bottom entry M25                                                                                                                                          |
| Height                 | 260mm                                                                                                                                                                       |
| Width                  | 118mm                                                                                                                                                                       |
| Depth                  | 144mm                                                                                                                                                                       |
| Dimension of enclosure | 225x118 mm (HxW)                                                                                                                                                            |
| Material of enclosure  | Polycarbonate                                                                                                                                                               |
| Contacts               | the contacts are brass nickel plated, The contact carrier is made of polyamide                                                                                              |

| Additional technical properties |                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------|
|                                 | The cable entry is one at top open, one at top is closed, and two at bottom are closed                   |
|                                 | Protective cover for fuses with stamping, With mounting rail for 5 modules, vertical, With mounting rail |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.925 kg / Piece |
| Packaging      | Carton           |
| Content amount | 1 ST             |
| EAN            | 4024941196956    |
| Length         | 275 mm           |
| Width          | 175 mm           |
| Height         | 137 mm           |
| Weight         | 1.05 kg          |
| Volume         | 5,737.5 ccm      |

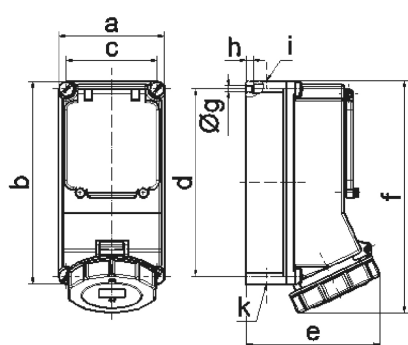

| Ampere Polzahl | 16 4    | 16 5    | 32 3    | 32 4    | 32 5    |
|----------------|---------|---------|---------|---------|---------|
| a              | 118,0   | 118,0   | 118,0   | 118,0   | 118,0   |
| b              | 225,0   | 225,0   | 225,0   | 225,0   | 225,0   |
| c              | 101,0   | 101,0   | 101,0   | 101,0   | 101,0   |
| d              | 208,0   | 208,0   | 208,0   | 208,0   | 208,0   |
| e              | 127,0   | 134,0   | 143,0   | 143,0   | 149,0   |
| f              | 245,0   | 245,0   | 255,0   | 255,0   | 255,0   |
| g ø            | 6,5     | 6,5     | 6,5     | 6,5     | 6,5     |
| h              | 8,0     | 8,0     | 8,0     | 8,0     | 8,0     |
| i              | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |
| k              | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |
|                |         |         |         |         |         |
|                |         |         |         |         |         |