

wall mounting socket outlet, switched, interlocked - housing dimensions 170x90



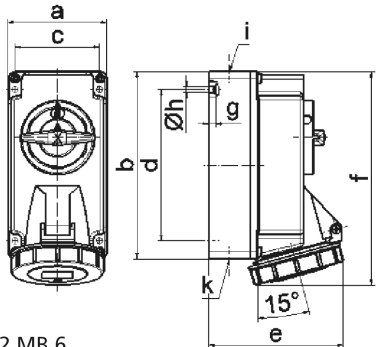
Product description	
BALS-Prd.-Nr	160058
EAN	4024941102155
Product category	Wall mounting socket outlet, switched, interlocked
Current	16A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	7 h
Voltage	277/480 - 288/500V~

Product description	
Frequency	50/60Hz
Protection degree	IP67/69
Colour code	black RAL 9005
Colour of appliance	Hinged lid black RAL 9005, Housing bottom grey RAL 7035, Bayonet ring grey RAL 7035, Housing top grey RAL 7035, Control knob grey RAL 7035
Connection design	screwless spring terminals with Kontex-Kontakt
Maximum conductor size	4,0 qmm
Cable entry	top entry M20 bottom entry M25/20
Height	195mm
Width	90mm
Depth	123mm
Dimension of enclosure	170x90 mm (HxW)
Material of enclosure	Polycarbonate
Contacts	the contacts are brass nickel plated, The contact carrier is made of polyamide

Additional technical properties	
	The cable entry is one at top open and two at bottom closed
	In 0-position lockable for 3 padlocks with bow diameter up to 7 mm, Lower part of housing rotatable by 180°

Logistics data	
Weight/pcs	0.64 kg / Piece

Logistics data	
Packaging	Carton
Content amount	1 ST
EAN	4024941102155
Length	124 mm
Width	91 mm
Height	196 mm
Weight	0.7 kg
Volume	2,211.664 ccm

 12 MB 6	Ampere	16	16	16			
	Polzahl	3	4	5			
	a	90,0	90,0	90,0			
	b	170,0	170,0	170,0			
	c	77,0	77,0	77,0			
	d	137,5	137,5	137,5			
	e	108,0	115,0	121,0			
	f	191,5	191,5	191,5			
	g	6,0	6,0	6,0			
	h ø	5,5	5,5	5,5			
	i	M20	M20	M20			
	k	M20/25	M20/25	M20/25			