

## wall mounting socket outlet, switched, interlocked - housing dimensions 170x90




| Product description       |                                                    |
|---------------------------|----------------------------------------------------|
| BALS-Prd.-Nr              | 16008                                              |
| EAN                       | 4024941160087                                      |
| Product category          | Wall mounting socket outlet, switched, interlocked |
| Current                   | 16A                                                |
| Number of poles           | 3p                                                 |
| Arrangement of phases     | 2P+PE                                              |
| Position of earth contact | 4 h                                                |
| Voltage                   | 100 - 130V~                                        |

| Product description    |                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                         |
| Protection degree      | IP44                                                                                                            |
| Colour code            | yellow RAL 1012                                                                                                 |
| Colour of appliance    | Hinged lid yellow RAL 1012, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Control knob grey RAL 7035 |
| Connection design      | screwless spring terminals with Kontex-Kontakt                                                                  |
| Maximum conductor size | 4,0 qmm                                                                                                         |
| Cable entry            | top entry M20 bottom entry M25/20                                                                               |
| Height                 | 188mm                                                                                                           |
| Width                  | 90mm                                                                                                            |
| Depth                  | 108mm                                                                                                           |
| Dimension of enclosure | 170x90 mm (HxW)                                                                                                 |
| Material of enclosure  | Polycarbonate                                                                                                   |
| Contacts               | the contacts are brass nickel plated, The contact carrier is made of polyamide                                  |

| Additional technical properties |                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------|
|                                 | The cable entry is one at top open and two at bottom closed                                                 |
|                                 | In 0-position lockable for 3 padlocks with bow diameter up to 7 mm, Lower part of housing rotatable by 180° |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.57 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Carton        |
| Content amount | 1 ST          |
| EAN            | 4024941160087 |
| Length         | 205 mm        |
| Width          | 102 mm        |
| Height         | 134 mm        |
| Weight         | 0.63 kg       |
| Volume         | 2,118.48 ccm  |

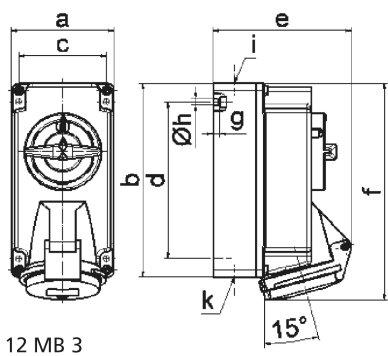

| Ampere  | 16     | 16     | 16     |  |  |  |
|---------|--------|--------|--------|--|--|--|
| Polzahl | 3      | 4      | 5      |  |  |  |
| a       | 90,0   | 90,0   | 90,0   |  |  |  |
| b       | 170,0  | 170,0  | 170,0  |  |  |  |
| c       | 77,0   | 77,0   | 77,0   |  |  |  |
| d       | 137,5  | 137,5  | 137,5  |  |  |  |
| e       | 108,0  | 114,0  | 121,0  |  |  |  |
| f       | 188,5  | 188,5  | 190,0  |  |  |  |
| g       | 6,0    | 6,0    | 6,0    |  |  |  |
| h ø     | 5,5    | 5,5    | 5,5    |  |  |  |
| i       | M20    | M20    | M20    |  |  |  |
| k       | M20/25 | M20/25 | M20/25 |  |  |  |
|         |        |        |        |  |  |  |
|         |        |        |        |  |  |  |