

Pretium® 3-Module Housing (PCH-M3-01U)

CORNING

Features and Benefits

Plug & Play™ Universal Systems compatible

Ease of use and maximize density

Module tray slides forward

Ease of access

Rugged gunmetal gray construction

Durability and matches other housings

Cable strain-relief

Fiber protection

Removable cover and air holes


Aids in cooling

Corning Pretium® PCH-M3-01U housing is designed to maximize density and optimize ease-of-use in Plug & Play™ universal systems applications. It holds three CCH-style modules and utilizes the RJ-clip integration, holding six-size zero plugs.

When using LC duplex or MT-RJ adapters, 24-fibers per module are available, providing a total modular 1U density of 72 fibers. The shallow 8.75-in depth of this rugged metal housing allows it to fit conveniently in many cabinet installations with housings mounted back to back. The shallow feature also minimizes airflow, maximizing the impact of cooling agents. To also aid in cooling, the rear of the housing includes offset airflow openings designed to allow more air into the housing. For heat-sensitive environments, the rear cover may be removed to further improve airflow through the unit. The housing mounts to a standard 19-in frame and includes cable strain-relief via the RJ-clip integration piece.



Pretium 3-Module Housing PCH-M3-01U (closed)
| Photo LAN992

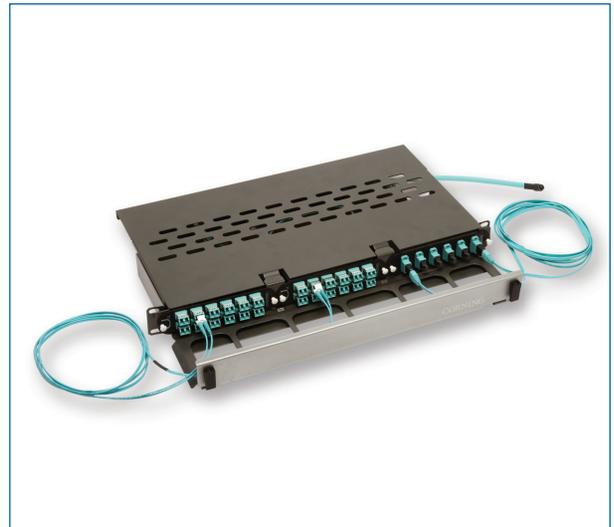

Pretium 3-Module Housing PCH-M3-01U (open)
| Photo LAN995

Pretium® 3-Module Housing (PCH-M3-01U)



Ordering Information

Part Number	Description	Dimensions (HxWxD)	Shipping Weight
PCH-M3-01U	Pretium® 3-Module Housing, 1 rack unit, holds three CCH Plug & Play™ reduced-depth modules	-	1.75 kg (3.85 lb)

Pretium® 3-Module Housing (PCH-M3-01U)

CORNING

Accessories

Part Number	Product Description	Units per Delivery	
PC1-BKT-23	Pretium EDGE® Extension and Flush Mount Bracket for mounting 1U housings into 23-in racks or cabinets	1/1	

* Plug & Play™ Universal Systems modules sold separately.

Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING