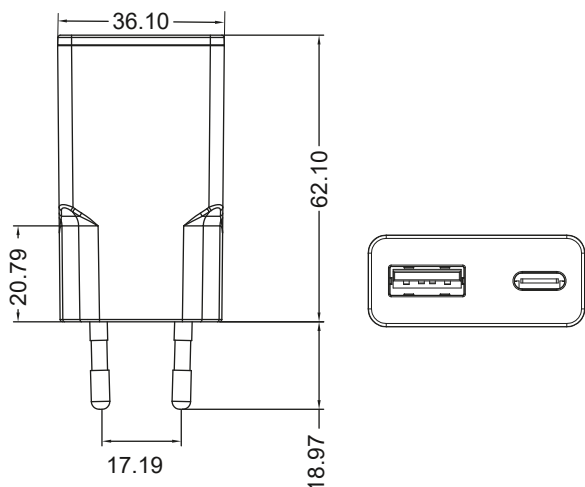


1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A	Artikel-Nr. / Article No.		Beschreibung / Description			Farbe / Colour								A
	75729		TRA USB 20W 2 Port 1xC PD/ 1xA QC GaN slim sw			schwarz / black								
B	75730		TRA USB 20W 2 Port 1xC PD/ 1xA QC GaN slim ws			weiß / white								
C														C
D														D
E	USB-C™ PD GaN Dual-Schnellladegerät Slim (20 W) - Mit 20 W Leistung ist der USB-Adapter speziell auf kleine Geräte wie Smartphones, Bluetooth-Kopfhörer, Tablets oder Powerbanks zugeschnitten - Halbleiter mit GaN-Technologie ermöglichen schnelleres und effizienteres Laden - Das USB-Ladegerät mit Power Delivery passt die Ausgabeleistung sicher und dynamisch an das angeschlossene Gerät an - Dank zwei USB-Ports reicht ein Steckdosenadapter - Die Schutzelektronik sichert angeschlossene Geräte gegen Überstrom, Überladung und Überhitzung Anschlüsse: Eingang: Ausgang PD: Ausgang QC: Ausgang PD+QC: Durchschnittlicher Wirkungsgrad: Wirkungsgrad bei geringer Last (10 %): Leistungsaufnahme im Leerlauf: Schutzart: Schutzklasse: Abmessungen: Gewicht: Euro-Stecker (Typ C, CEE 7/16) USB-C™ PD (Power Delivery)-Buchse USB-A QC (Quick Charge)-Buchse 100-240 V ~, 50/60 Hz, 0,6 A 5,0 V=, 3,0 A, max. 15,0 W oder 9,0 V=, 2,2 A, max. 20,0 W oder 12,0 V=, 1,7 A, max. 20,0 W PPS: 3,3-5,9 V=, 3,0 A, 17,7 W, 3,3-11,0 V=, 1,8 A, 19,8 W 5,0 V=, 3,0 A, 15,0 W oder 9,0 V=, 2,0 A, 18,0 W max. oder 12,0 V=, 1,5 A, 18,0 W max. 5,0 V=, 3,0 A, 15,0 W max. 82,9 % 79,1 % 0,07 W IP20 II □ 81,0 x 36,1 x 15,3 mm ca. 40 g													E
F	USB-C™ PD GaN Dual Fast Charger Slim (20 W) - With 20 W of power, the USB adapter is specially designed for small devices such as smartphones, Bluetooth headphones, tablets or power banks - Semiconductors with GaN technology enable faster and more efficient charging - The USB charger with Power Delivery safely and dynamically adjusts the output power to the connected device - Thanks to two USB ports, a single socket adapter is all you need - The electronic protection system safeguards connected devices against overcurrent, overcharging and overheating Connections: Input: Output PD: Output QC: Output PD+QC: Average active efficiency: Efficiency at low load (10 %): No-load power consumption: Protection level: Protection class: Dimensions: Weight: Euro plug (Type C, CEE 7/16) USB-C™ PD (Power Delivery) socket USB-A QC (Quick Charge) socket 100-240 V ~, 50/60 Hz, 0.6 A 5.0 V=, 3.0 A, 15.0 W max. or 9.0 V=, 2.2 A, 20.0 W max. or 12.0 V=, 1.7 A, 20.0 W max. PPS: 3.3-5.9 V=, 3.0 A, 17.7 W, 3.3-11.0 V=, 1.8 A, 19.8 W 5.0 V=, 3.0 A, 15.0 W max. or 9.0 V=, 2.0 A, 18.0 W max. or 12.0 V=, 1.5 A, 18.0 W max. 5.0 V=, 3.0 A, 15.0 W max. 82.9 % 79.1 % 0.07 W IP20 II □ 81.0 x 36.1 x 15.3 mm approx. 40 g													F
G														G
H														H
I	Änderungen			Datum	Name		Bezeichnung					Blatt		I
	Datum	Name	gez.:	30.01.2025	fw		TRA USB 20W 2 Port 1xC PD/ 1xA QC GaN slim XX					1		
			gepr.:	30.01.2025	fw									
			Norm:											
J			Änderungen vorbehalten / Subject to change			Zeichnungs-Nr.:					von		J	
						75729, 75730					1			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	