

Technical specifications


Alkaline

Pro Power



LR03

Panasonic Typical Dimensions

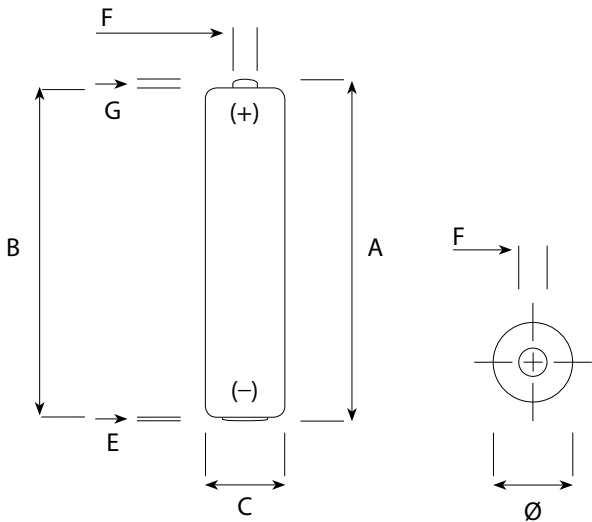

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	44,5	
B		43,3
C		4,3
E	0,5	
F	3,8	
G		0,8
Ø	10,5	9,5

Specifications

Name	LR03 / S / AAA / AM4 / MICRO / MN2400 / 24A / 24AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	11,2 g
Storage temp. range	+10°C ~ + 25°C
Operating temp. range	-20°C ~ + 45°C
Average Impedance	+/- 135 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell

Typical discharge values

LR03

