


PLL 23.0385.830.1/DALI

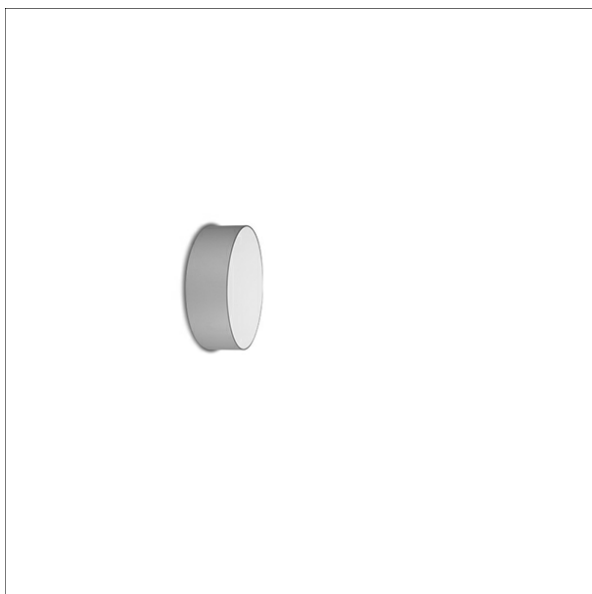

Beschreibung

- repräsentative Wandleuchte in rundem Design für homogene Beleuchtung und anspruchsvolle architektonische Lichtgestaltung
- keine UV- und Wärmestrahlung
- Stahlblechgehäuse über Bajonettverschluss abnehmbar
- Acrylglascheibe opal
- Montageplatte für einfache Schraubbefestigung
- 5-polige Anschlussklemme
- Betriebsgerät (LED-Konverter) integriert (mit DALI Dimmung)

Standardoptionen




Sonderoptionen



Lichttechnik / Normen


Leuchtmittel	LED linear / CRI 80 / 3000 K
EPREL Lichtquellen	833872
Lebensdauer	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Systemleistung	18.0 W
Leuchten-Lichtstrom	1920 lm
Systemeffizienz	108.47 lm/W
Moduleffizienz	181.52 lm/W
UGR Klasse	≤22
Versorgungsspannung	220 - 240 V / 50 - 60 Hz
Schutzklasse	I
Schutzart	IP20

Farbe	Artikelnummer	EAN
silber	633908	4043544359056
weiß	633909	4043544359063
schwarz	642272	4043544480590

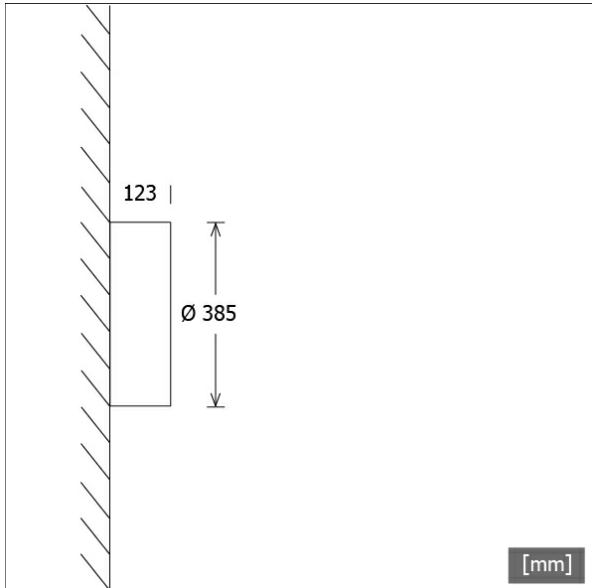

Abmessungen / Gewichte

Außendurchmesser	385 mm
Höhe	123 mm
Nettogewicht	3.78 kg
Bruttogewicht	4.44 kg

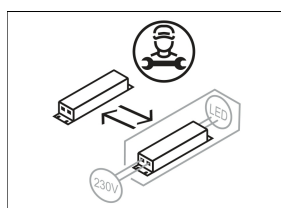


PLL 23.0385.830.1/DALI

PLL 23.0385.830.1/DALI

PL 23 (1xLED 18W 830/3000K 1920lm)

— C0/C180 cd / 1000 lm — C90/C270



	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	8.70	8.71	76.7
6.0	17.41	17.41	19.2
9.0	26.11	26.12	8.5
12.0	34.82	34.82	4.8
15.0	43.52	43.53	3.1

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.3
UGR C90/C270	22.3
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Zubehör



ZB-OR DONGLE
Organic Response IR-Dongle-Set



ZB-OR GATEWAY
Organic Response IoT-Gateway Kaskadenserie



ZB-OR-A SENSOR
Organic Response Sensor für Anbaumontage



ZB-OR-P SENSOR/3000
Organic Response Sensor für Pendelmontage