


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.
Tolerance specifications do not include clearances inherent in the design.

Bi-Color LED´s
(Green/Yellow)

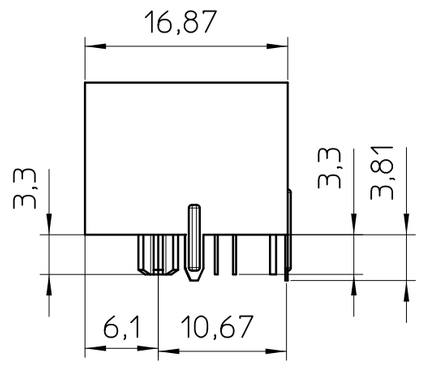


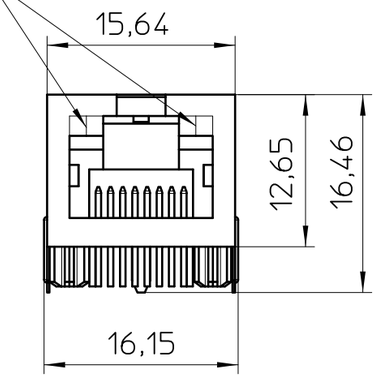

PCB drill hole dimensions
(seen from component side)

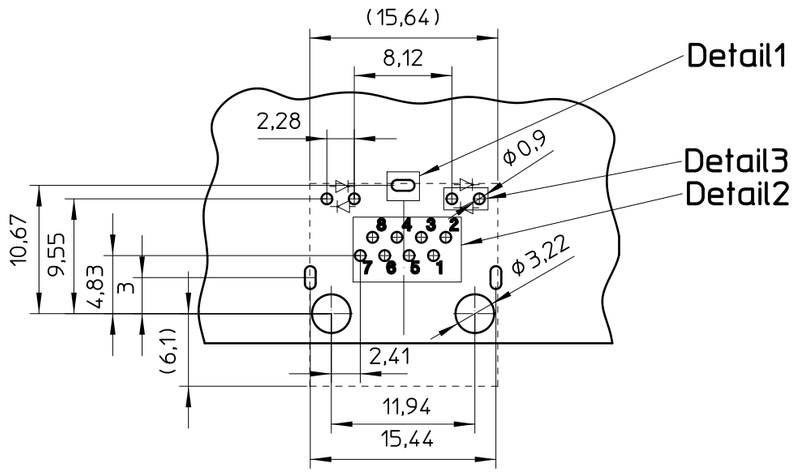


Detail1
5:1




Detail2
5:1

Signal PIN Number Detail

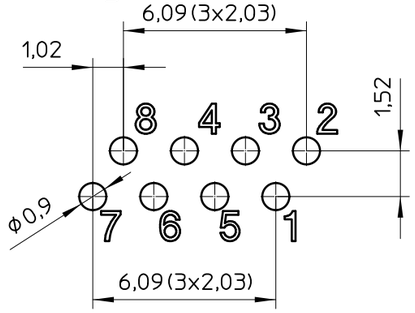


Detail3
5:1

2x
LED Polarity Detail



PCB PCB recommended layout for THR and solder wave copper layer and solder paste mask (150 µm)

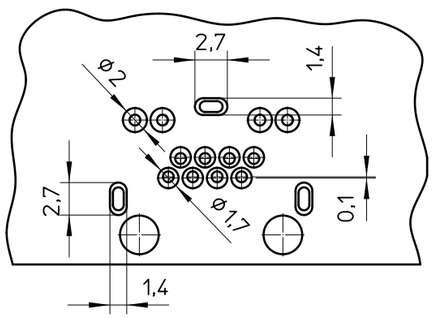

LED- Specifications

Bi-Color LED		Forward Voltage (Max)	*Forward Voltage (Typ)	Wavelength
Green/Yellow	Green	2,5 V	2,2 V	565 nm
	Yellow	2,5 V	2,1 V	590 nm

* With a forward current of 20 mA (Typ)

DIN A3	document-No. / RI: 01230413 / 07	date: 09.11.2022	scale: 2:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm] - EN ISO 291 23/50
PHOENIX CONTACT	document-type: TECDOC 2D_Productfamily			
page 1 of 1	description: CUC-IND-J1ST-A/R4LS-LED			

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.