

Art.-Nr: 123411

Bezeichnung: X4500SCR

Customer recognition	Signatu	re confirmation
Please carefully verify all the function of the Product, After signing recognize that function of product is	Approval:	
Correct by customers, and all the function of products are in line with specifications of the customers.		
	Sign:	Date:



Remarks:

1. C₅ means the value of the nominal capacity of a cell.

A. Basic index

7. Dasie muca			
Туре		Sealed Rechargeable Ni-MH	
N	lodel	GLH-SC4500-10C	
(Size	SC SC	
Nomina	l Voltage (V)	1.2V	
Minimum Capacity (mAh)		4250 mAh	
Typical Capacity (mAh)		4350 mAh	
Typical Weight		67g	
Dimension	Height	43.8(±0.2mm)	
Dimension	Diameter	22.9(±0.2mm)	
	Current (mA)	450(0.1C ₅)	
Standard Charge	Time (min)	960 min	
Quick Charge	Current (mA)	2250 (0.5C ₅)	
	Time (h)	-▽V 5mv	
	Current (mA)	4500 (1C ₅)	
Rapid Charge	Time (min)	-∇V 5mv	
	Standard Charge	0~45℃	
Operation	Quick Charge	0~40°C	
Temperature(°C)	Rapid Charge	0~40℃	
	Discharge	-20~55℃	
Storage	≤12 months	-20~25℃	
Temperature(°C)	≤3 months	-20~35℃	
	≤1 month	-20~40℃	
Trickle Charge (mA)		39~65	
	e (mA)(continuous)	30A—45A	
Internal Impedance (mΩ)		≤ 5 (1000Hz)	
Charge Retention(20℃)		≥70%	
IEC Cycle Life (Times)		≥500	
30A Discharge Cycle Life (Times)		≥60	



B. Test Report

Tests are carried out within one month of delivery under the following conditions:

Room Temperature 20±5°C

Relative Humidity 65%±20%

And all the test standards are conformed to IEC61951-2 standards


Test items	Test condition	Test results
Internal Impedance	After the battery is fully charged, within 4 hour, the impedance is tested by 1000Hz AC source.	≤ 5 mΩ
Capacity (Quick Charge)	Discharging at 880 mA to 1.00V/ pack. Charging at 450mA for 15 hour, Discharging at 880mA to 1.0V/ pack. Measuring the discharge time	Up to 3 cycles are allowed ≥300min
30A Capacity	Discharging at 2250mA to 1.0V, Charging at 2250mA for-∇V 5mv, 30A discharge to 0.9V Measuring the discharge Capacity	Up to 3 cycles are allowed Minimum Capacity
MPV	Mean Voltage	≥4250mAh MPV ≥1.16V
30A Discharge Cycle Life (Times)	Discharging at 2250mA to 1.00V/ pack. Charging at 2250mA for-∇V5mv 30A discharge to 0.9V Stand Ting for 90min, life-cycle test: Charging at 2250mA for-∇V5mv 30A discharge to 0.9V Stand Ting for 90min, Cycle No 60	Cycle No 60: Residual capacity ≥4050mAh (90%)
Charge Retention	The fully charged battery is held under temperature of 20±2°C for 28 days, the capacity is measured at 880mA discharging rate	≥210min
Voltage	Discharging at 2250mA to 1.00V/ pack.Charging at 1000mA for 2.3 hour, 20±5℃ stored 6 months	Volt≥1.10V
Retention	Discharging at 2250mA to 1.00V/ pack.Charging at 1000mA for 2.3 hour, 30±5℃ stored 4 months	Volt≥1.10V




Overcharge test	The cell is charged continuously for 60 hour at 0.1C	No functiona change,No leakage
IEC Cycle Life	IEC61951-2(2003)7.4.1.1	≥500
Low Temperature Discharge	Standard Charge, Storage:24hrs at 0±2℃ 0.2C discharge at 0±2℃	≥180min
Short circuit test	The is fully charged cell is shorted for 1 hour with a load or lighter with its resistance less than $100m\Omega$. This test must be carried out in a protective chamber	Operation of safety valve No explosion Leakage may occur
Bump test	The bump test is carried out under the following conditions: Peak acceleration: 98m/s2 Corresponding duration of pulse: 16ms Corresponding velocity change: 1.00m/s Number of bumps: 1000times: 1000次	No functional change,No leakage
Free falling(drop)	Charge at 0.1C for 16hrs,and then leave for 24hrs,check battery before / after drop Height: 100 cm Thickness of wooden board: 20mm Direction is not specified Test for 6 times	△V<0.02V/cell △Ri<5%/cell

C. General Characteristic




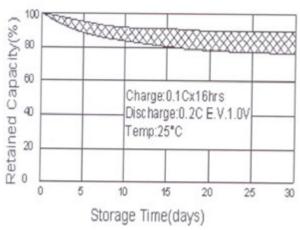



Cycle Life

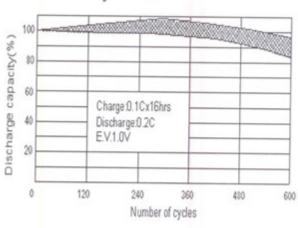



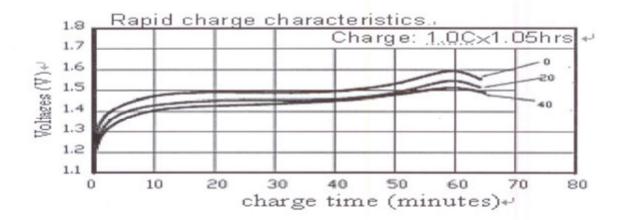

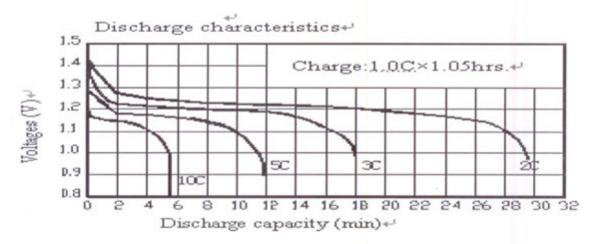

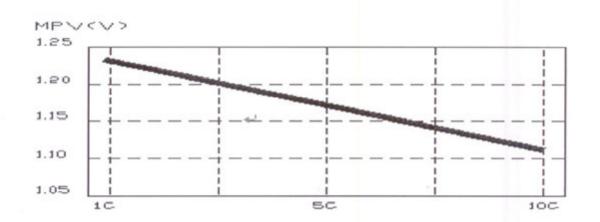



D. Precautions:

- Batteries should be charged prior to use.
- When using a new battery for the first time or after long term storage, please fully charge the battery Before use.
- 3. For charging methods please reference to our technical handbook.
- 4. Use the correct charger for Ni-Cd or Ni-MH batteries.
- 5. Do not reverse charge batteries.
- 6. Do not short circuit batteries, permanent damage to batteries may result.
- 7. Do not incinerate or mutilate batteries, may burst or release toxic material.
- Do not subject batteries to adverse condition such as extreme temperature, deep cycling and excessive Overcharge / overdischarge.
- 9. Store batteries in a cool dry place.
- 10. Do not mix Gelong batteries with other battery brands or batteries of a different chemistry such as Alkaline and zinc carbon.
- 11. Do not mix new batteries in use with semi-used batteries, overdischarge may occur.
- 12. Avoid batteries being used in an airtight compartment. Ventilation should be provided inside the battery compartment; otherwise batteries may generate hydrogen gas, which could cause an explosion if exposedto an ignition source.
- 13. When connecting a battery pack to a charger, ensure correct polarity.
- 14. If find any noise, excessive temperature or leakage from a battery, please stop its use.
- 15. When the battery is hot, please do not touch it and handle it, until it has cooled down.
- Do not remove the outer sleeve from a battery pack nor cut into its housing.
- 17. When find battery power down during use, please switch off the device to avoid overdischarge.
- 18. When not using a battery, disconnect it from the device.
- 19. Unplug a battery by holding the connector itself and not by pulling at its cord.
- After use, if the battery is hot, before recharging it, allow it to cool in a well-ventilated place out of direct sunlight.
- 21. Never put a battery into water or seawater.
- 22. During long term storage, battery should be charged and discharged once every 4 months.
- 23. Do not attempt to take batteries apart or subject them to pressure or impact. Heat may be generated or fire may result. The alkaline electrolyte is harmful to eyes and skin, and it may damage clothing upon contact.
- 24. Keep away from children. If swallowed, contact a physician at once.
- 25. Please contact Gelong before conducting those destructive tests.



E.Append: IEC Endurance in cycles

Before the endurance in cycles test, the cell shall be discharged at 0.2 1tA to a final voltage of 1.0V/sell. The following endurance test shall then be carried out, irrespective of cell designation, in an ambient temperature of 20°C±5°C. Charge and discharge shall be carried out at constant current throughout, using the conditions specified in table 5. Precautions shall be taken to prevent the cell-case temperature from rising above 35°C during the test, by providing a forced air draught if necessary. NOTE-Actual cell temperature, not the ambient temperature, determines cell performance.

Table 5-Endurance in cycles

Cycle number	Charge	Stand in Charged condition	Discharge
1	0.1C _t A for 16 h	None	0.25 C _t A for 2 h 20 min ²)
2 to 48	0.25 C _t A for 3 h 10 min	None	0.25 C _t A for 2 h 20 min ²)
49	0.25 C _t A for 3 h 10 min	None	0.25 C _t A to 1.0V/cell
50	0.1 C _t A for 16 h	1h to 4h	0.2C ₅ A to 1.0V/cell

It is permissible to allow sufficient open-circuit rest time after the completion of discharge at cycle 50, so as to start cycle 51 at an exact two-week internal. A similar procedure may be adopted at cycles 100.150.200.250,300,350,400and 450.

If cell discharge voltage drops below 1.0V/cell, discharge may be discontinued.

Cycles 1 to 50 shall be repeated until the discharge duration on any 50th cycle becomes less than 3h at this stage, a further cycle as specified for cycle 50 shall be carried out. The endurance test is considered complete when two such successive cycles give a discharge duration less than 3h. The number of cycles obtained when the test is completed shall be not less than 500.