


Article-No: 7a043429

Tubular Luminaires

Luminaire TUBIS LED INDUSTRY DALI 1260mm PC 1x31W 065°medium 4600lm

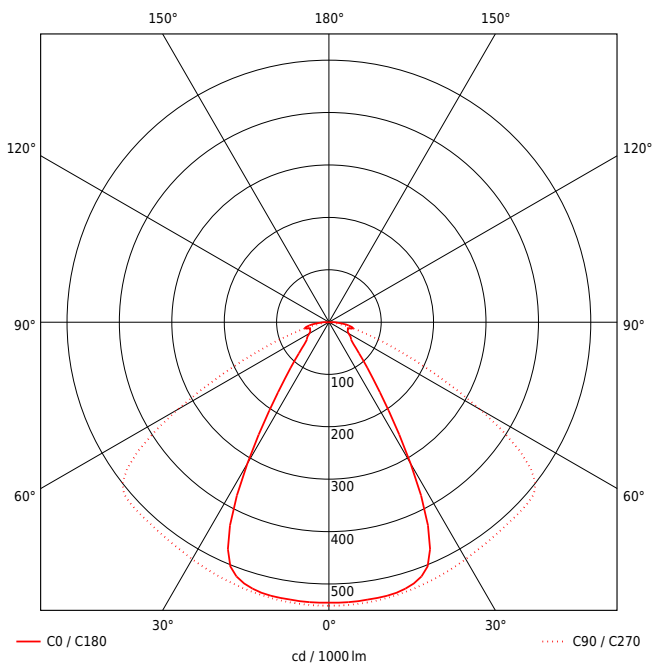

Tubular lamp highest industry demands made of impact resistant PRACHTOPAL® or polycarbonate (clear). Pressurised-water resistant tube, substantially acid and alkali resistant, diameter 90mm. Integrated robust industry LED driver. Homogeneous light output due to smart MID-Power LED layout. Several light output angles available thanks to linear lens system. Optimized thermal management due to X-Wing cooling profile. Through-wiring up to maximum 5x2.5mm² available. Short ageing-resistant silicone seals. Ingress protection IP66/IP68(2m)/IPX9K. Variable mounting points using stainless steel PRACHT tube clips, suitable for ceiling-, horizontal and vertical wall mounting, accessories for pendant and mounting rail installation available for order. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

EAN 4018098286721

Statistical product number 94054039

LAMP

Product type	LED
Number of lamps /LED-rows	1
Color temperature K	4.000
Color rendering index	>80
Amount LED	112
Color tolerance (initial MacAdam)	3

POWER

Luminous flux lm	4600
Systempower W	31
Efficacy lm/W	148

LIGHT ENGINEERING

Light distributor	Refraktorlinse
Light distribution	medium beam
Light distribution angle in °	65
Unified Glare Rating UGR 4H 8H C0 C90	18.4 / 23.5

TECHNICAL DATA

suitable for emergency lighting (EL)	yes
Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	I
Ballast	LED-converter DIM DALI
Through-wiring mm ²	without
Glow wire test	650 °C - 5 sec.
D-rating	yes
Certification mark	ENEC
Type of voltage	AC/DC
Circuit breaker B10A	7
Circuit breaker B16A	12
Circuit breaker C10A	14
Circuit breaker C16A	24
Voltage spike protection U (L-N)	4
Voltage spike protection U (L-PE)	4

CAPACITY

IK-Impact resistance	08
Warranty (years)	5
L70/B10 Life expectancy at 25°C	>100000
L70/B50 Life expectancy at 25°C	>100000
L80/B10 Life expectancy at 25°C	>100000
L80/B50 Life expectancy at 25°C	>100000
L90/B10 Life expectancy at 25°C	80000
L90/B50 Life expectancy at 25°C	82000
Outdoor areas	Suitable for unprotected outdoor area if within close building proximity with cable entry bottom- or sidewise
max. lowest temperature in °C	-30
max. highest temperature in °C	50
Ingress protection class	66/68(2m)/X9K

DIMENSIONS AND WEIGHT

Length mm	1260
Width mm	90
Height mm	105
Outside diameter in mm	90
Weight netto in kg	4.2

PACKAGING

PU 1 piece	Box
Length m PU1	1.55
Width m PU1	0.1
Height m PU1	0.09
Gross weight kg PU1	4.4

ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling, horizontal and vertical wall
Optional installation	Pendulum, Rail installation
exchangeable LED board	possible

MATERIAL

Case color	opaque
Renewable resources possible	no
Housing material	PC-polycarbonate
Cover material	PC

The right of error and later technical developments is reserved.

State: 28.10.2020