


Article-No: 5261350

Diffuser Luminaires

Luminaire LUNA N LED WET 1597mm 1x39W LOPRA 5000lm



Diffuser luminaire with MID-Power LEDs, suitable for unprotected outdoor areas, housing made of grey, glass fibre reinforced polyester, LOPRA cover for glare-free and homogeneous illumination, single LED light points are not visible, seals made of age-resistant silicone foam, clip-lock made of stainless steel, metal gear tray, easy mounting through variable mounting points with PRACHT-CLIP-SYSTEM (stainless steel), suitable for ceiling mounting; pendulum, carrier rail and horizontal wall mounting possible with accessories. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

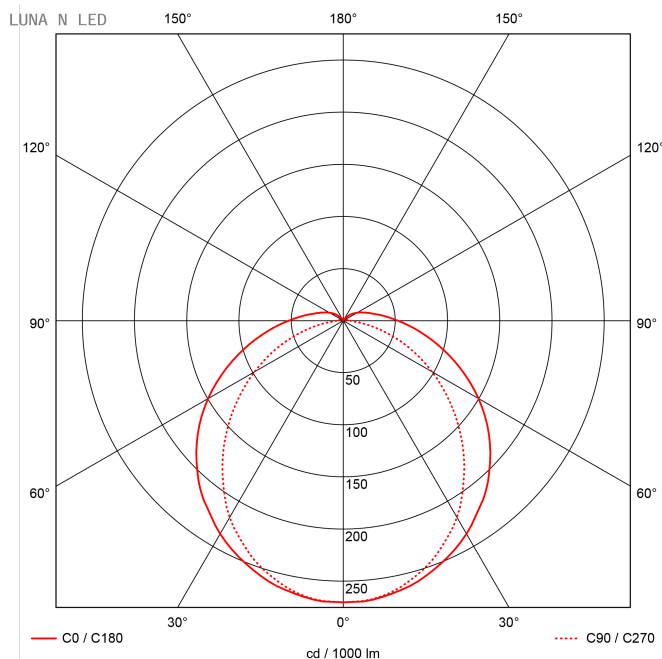

EAN 4018098235194

Statistical product number 94054039

LAMP

Product type	LED
Number of lamps /LED-rows	1
Color temperature K	4.000
Color rendering index	>80
Amount LED	120
Color tolerance (initial MacAdam)	3

POWER

Luminous flux lm	5000
Systempower W	39
Efficacy lm/W	128

LIGHT ENGINEERING

Light distribution	wide beam
Light distribution angle in °	120
Unified Glare Rating UGR 4H 8H C0 C90	24.5 / 21.7

TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	I
Ballast	LED-converter on/off
Through-wiring mm²	as optional accessories available
Glow wire test	650 °C - 5 sec.
D-rating	yes
Type of voltage	AC/DC
Circuit breaker B10A	15
Circuit breaker B16A	24
Circuit breaker C10A	24
Circuit breaker C16A	40

CAPACITY

IK-Impact resistance	02
Warranty (years)	2
L80/B10 Lebensdauer bei 25°C	62000
L70/B50 Life expectancy at 25°C	
Unprotected outdoor areas	suitable
max. lowest temperature in °C	-20
max. highest temperature in °C	35
Ingress protection class	66
Agricultural use	unsuitable

DIMENSIONS AND WEIGHT

Length mm	1597
Width mm	86
Height mm	94
Weight netto in kg	2.5

PACKAGING

Length m VPE	1.665
Width VPE in m	0.095
Height VPE in m	0.1
Weight incl. packaging kg	2.9

ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling
Optional installation	Pendulum, Rail installation, horizontal wall
exchangeable LED board	possible

MATERIAL

Case color	grey RAL 7035
Renewable resources possible	no
Housing material	Fiberglass
Cover material	LOPRA

The right of error and later technical developments is reserved.

State: 14.05.2020