


swiss standard socket outlet - type 13, flange 50x50



Product description	
BALS-Prd.-Nr	7722
EAN	4024941228237
Product category	Swiss standard socket type 13, QUICK-CONNECT screwless push-contact
Current	10A
Number of poles	3p
Arrangement of phases	2P+PE
Voltage	250V~
Frequency	AC
Protection degree	IP55

Product description	
Colour code	blue RAL 5015
Colour of appliance	Hinged lid blue RAL 5015, Enclosure grey RAL 7035
Connection design	screwless
Maximum conductor size	2,5 qmm
Height	65.5mm
Width	54mm
Depth	85.5mm
Flange size vertical in mm	50mm
Flange size horizontal in mm	50mm
Drill hole dist. vertical mm	38mm
Drill hole dist. horizontal mm	38mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, the contacts are brass nickel plated

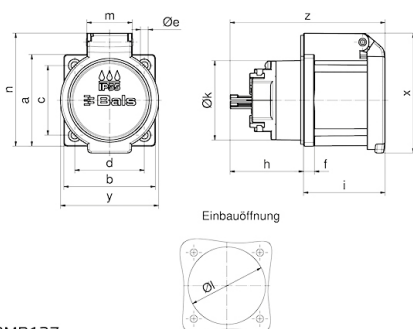

18MB137

Ampere Poles	10A 3pol.	10A 5pol.	16A 3pol.	16A 5pol.
a	50,0	50,0	50,0	50,0
b	50,0	50,0	50,0	50,0
c	38,0	38,0	38,0	38,0
d	38,0	38,0	38,0	38,0
Øe	4,2	4,2	4,2	4,2
f	6,0	6,0	6,0	6,0
h	40,5	40,5	40,5	40,5
i	45,0	45,0	45,0	45,0
Øk	43,5	43,5	43,5	43,5
Øl	44,5	44,5	44,5	44,5
m	25,0	25,0	25,0	25,0
n	62,0	62,0	62,0	62,0

